

DH-IPC-HFW2231T-ZAS-S2

2MP WDR IR Bullet Network Camera



- 2MP, 1/2.8" CMOS image sensor, low illuminance, high image definition
- Outputs 2MP (1920 × 1080)@25/30 fps
- H.265 codec, high compression rate, ultra-low bit rate
- Built-in IR LED, max IR distance: 60 m
- ROI, SMART H.264/H.265, flexible coding, applicable to various bandwidth and storage environments
- Rotation mode, WDR, 3D DNR, HLC, BLC, digital watermarking, applicable to various monitoring scenes
- Intelligent detection: Intrusion, tripwire
- Abnormality detection: Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnected, IP conflict, illegal access, local alarm, voltage detection, audio abnormal
- Alarm: 1 in, 1 out; audio: 1 in, 1 out; supports max. 256 GB MicroSD card
- 12V DC/PoE power support
- IP67 protection, IK10 protection (optional)



System Overview

With upgraded H.265 encoding technology, Dahua Lite series camera has efficient video encoding capacity, which saves bandwidth and storage space. This camera adopts the latest starlight technology and displays better colorful image in the environment of low illumination. It supports SD card storage, waterproof function, dust-proof function, complying to the standards of IP67.

Functions

Smart(H.265+ & H.264+)

Adopting advanced algorithm of auto stream control according to the environment, Dahua smart encoding technology realizes the higher efficiency than (H.265 & H.264), providing high-quality video, and reducing the cost of storage and transmission.

Wide dynamic range (WDR)

Dahua adopts advanced Wide Dynamic Range (WDR) technology. You can get clear details in the environment of strong brightness contrast. In high brightness and back-light environment, bright region and dark region with strong light source, you can also get clear images.

Starlight

Dahua Starlight technology mainly applies to the environment of low illumination, and it can provide clear colorful video. Even in the environment of min. illumination, the technology can guarantee the good image effect.

Intelligent Video Analysis (IVS)

With advanced video algorithm, Dahua camera supports intelligent detection, such as tripwire and intrusion and so on.

Protection (IP67, wide voltage)

IP67: The camera passes a series of strict test on dust and soak. It has dust-proof function, and the enclosure can work normally after soaking in 1 m deep water for 30 minutes.

Wide voltage: The camera allows ±30% input voltage tolerance (wide voltage range), and it is widely applied to outdoor environment with unstable voltage.

Technical Specification					
Camera					
Image Sensor					
Effective Pixels					
ROM					
RAM					
Scanning System					
Electronic Shutter Speed					
Min. Illumination					
IR Distance					
IR On/Off Control					
IR LEDs Number					
Pan/Tilt/Rotation Range					
Lens					
Lens Type					
Mount Type					
Focal Length					
Max. Aperture					
Field of View					
Iris Type					
Close Focus Distance					
DORI Distance	Lens	detect	observe	recognize	identify
	W	44.1 m (144.69 ft)	17.6 m (57.74 ft)	8.8 m (28.87 ft)	4.4 m (14.44 ft)
	T	151.7 m (497.70 ft)	60.6 m (198.82 ft)	30.3 m (99.41 ft)	15.1 m (49.65 ft)
Smart Event					
General IVS Analytics					
Video					
Video Compression					
Smart Codec					
Video Frame Rate					
Stream Capability					
Resolution					
Bit Rate Control					
Video Bit Rate					
Day/Night					
BLC					
HLC					
WDR					
White Balance					
Gain Control					
Noise Reduction					
Motion Detection					
Region of Interest(RoI)					
Smart IR					
Image Rotation					
Mirror					
Privacy Masking					
Audio					
Audio Compression					
Network					
Network					
Protocol					
Interoperability					
User/Host					
Edge Storage					
Browser					
Security					
Management Software					
Mobile Phone					
Certification					
Certifications					
Port					
Audio Input					
Audio Output					
Alarm Input					
Alarm Output					

Power

Power Supply	12V DC/PoE (802.3af)
Power Consumption	< 9.6W

Environment


Operating Conditions	-30°C to +60°C (-22°F to +140°F)/less than ≤ 95% RH
Storage Temperature	-40°C to +60°C (-40°F to +140°F)
Protection	IP67;IK10(optional)

Structure



Casing	Metal
Dimensions	244.1 mm × Ø90.4 mm (9.61" × Ø3.56")
Net Weight	0.9 kg (1.98 lb)
Gross Weight	1.15 kg (2.54 lb)

Ordering Information

Type	Part Number	Description
2MP Camera	DH-IPC-HFW2231TP-ZAS-S2	2MP WDR IR Bullet Network Camera,PAL
	DH-IPC-HFW2231TN-ZAS-S2	2MP WDR IR Bullet Network Camera,NTSC
Accessories (optional)	PFA130-E	Junction Box
	PFA152-E	Pole Mount
	PFM321D	DC12V1A Power Adapter
	LR1002-1ET/1EC	Single-port Long Reach Ethernet over Coax Extender
	PFM900-E	Integrated Mount Tester
	PFM114	TLC SD Card

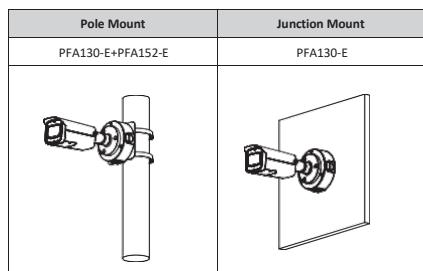

Dimensions (mm[inch])

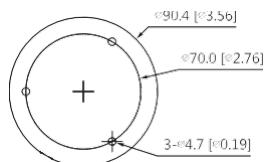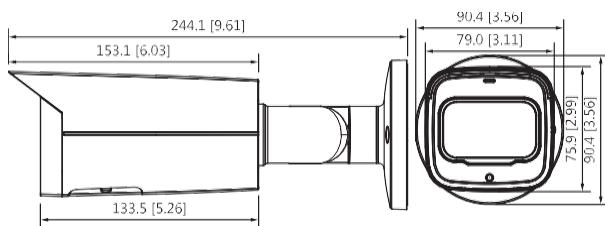

Accessories

Optional:



PFA130-E
Junction Box



PFA152-E
Pole Mount



PFM321D
DC12V1A Power
Adapter



LR1002-1ET/1EC
Single-port Long
Reach Ethernet over
Coax Extender



PFM900-E
Integrated Mount
Tester



PFM114
TLC SD Card