

LC3-UM06-IN Ceiling speaker, 6W, metal

www.boschsecurity.com



BOSCH

Invented for life



- ▶ Available in 6 W power output
- ▶ Lightweight construction
- ▶ Excellent for speech and music reproduction
- ▶ Available in attractive signal-white color

The LC3-UM06-IN is a general purpose 6 W ceiling loudspeaker, suitable for speech as well as music reproduction, it has a light weight ABS body with a metallic grille, finished with an attractive signal-white color.


System overview

The ceiling speaker unit is integrated with a metallic grille and an ABS baffle, resulting in a light weight construction and is finished in an attractive signal-white color.


The loudspeaker has good sensitivity and a wide frequency range, which makes it suitable for speech and music reproduction. It has an in-built line matching transformer, which supports a 100 V line output from the amplifier. The transformer has 3-tappings - full power, half power and quarter power, which helps the user to select the desired output levels based on their customized requirements. The loudspeaker is equipped with spring mounting mechanism, which helps in quick installation of the speaker on the ceiling.

Installation/configuration notes


The ceiling loudspeaker unit has a diameter of 170 mm. A cutout of 139 mm diameter needs to be carved out in the ceiling for installation. The loudspeaker can be installed by pulling up the mounting clamps and inserting the loudspeaker into the cutout in the ceiling.

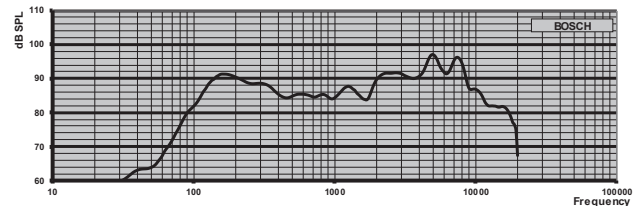

Frequency response 1/3rd octave smoothing

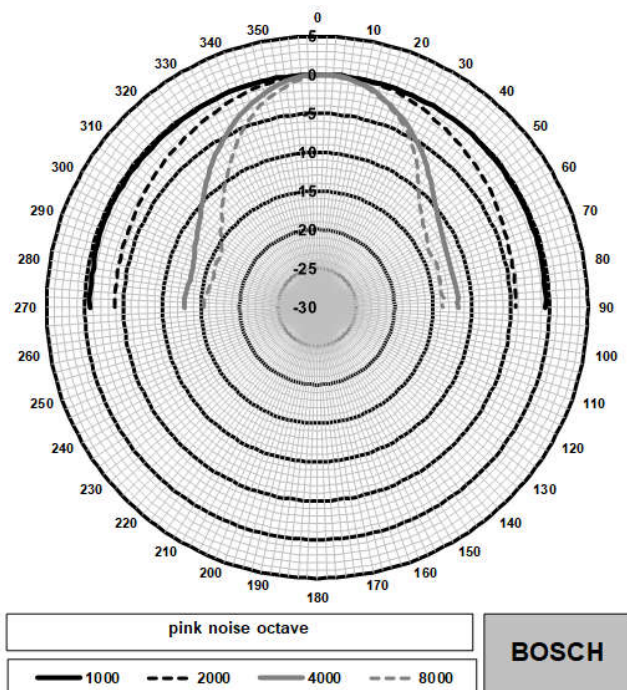

Polar diagram of LC3-UM06-IN (high frequency part), normalized at 0-degrees axis.

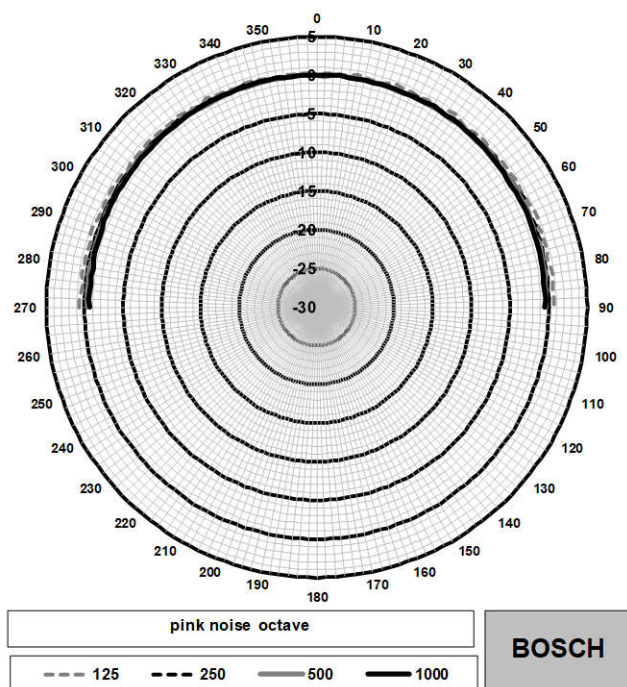

Polar diagram of LC3-UM06-IN (low frequency part), normalized at 0-degrees axis.

Octave band sensitivity LC3-UM06-IN

	Octave SPL 1 W/1 m	Total octave SPL 1 W/1 m	Total octave SPL Pmax/1 m
125 Hz	88.2	-	-

250 Hz	88.2	-	-
500 Hz	85.0	-	-
1000 Hz	85.3	-	-
2000 Hz	88.5	-	-
4000 Hz	91.5	-	-
8000 Hz	90.0	-	-
A-weighted	-	87.8	88.6
Lin-weighted	-	94.9	95.8

Octave band opening angles LC3-UM06-IN

	Horizontal	Vertical	
125 Hz	180	180	
250 Hz	180	180	
500 Hz	180	180	
1000 Hz	180	180	
2000 Hz	180	180	
4000 Hz	67	67	
8000 Hz	56	56	

Acoustical performance specified per octave
(all measurements are done with a pink noise signal;
the values are in dB SPL)

Parts included

Quantity	Component
1	Ceiling loudspeaker unit
1	Installation manual

Technical specifications

Electrical

Rated power	6 W
Input Voltage	100 V
SPL (at 6 W/1 W, 1 kHz))	92/85 dB
Effective frequency range (-10 dB)	75 Hz to 18 kHz
Opening angle at 1 kHz/4 kHz (-6 dB)	180°/65°
Rated impedance	1667 Ohm
Connector	4-pole screw connector

Mechanical

Dimensions (DxH)	170 mm x 70 mm
Weight	540 g
Color	Signal-white (RAL 9003)

Environmental

Operating temperature	-5 °C to +55 °C
Storage Temperature	-40 °C to +70 °C
Relative humidity	95%

Ordering information

LC3-UM06-IN Ceiling speaker, 6W, metal
 Ceiling speaker, 6W, metal
 Order number **LC3-UM06-IN**

Represented by:

Europe, Middle East, Africa:
 Bosch Security Systems B.V.
 P.O. Box 80002
 5600 JB Eindhoven, The Netherlands
 Phone: + 31 40 2577 284
 emea.securitysystems@bosch.com
 emea.boschsecurity.com

Germany:
 Bosch Sicherheitssysteme GmbH
 Robert-Bosch-Ring 5
 85630 Grasbrunn
 Germany
 www.boschsecurity.com

North America:
 Bosch Security Systems, Inc.
 130 Perinton Parkway
 Fairport, New York, 14450, USA
 Phone: +1 800 289 0096
 Fax: +1 585 223 9180
 onlinehelp@us.bosch.com
 www.boschsecurity.us

Asia-Pacific:
 Robert Bosch (SEA) Pte Ltd, Security Systems
 11 Bishan Street 21
 Singapore 573943
 Phone: +65 6571 2808
 Fax: +65 6571 2699
 apr.securitysystems@bosch.com
 www.boschsecurity.asia